





SPEAKER SPECIFICATIONS


Model Number:	C5005-8		
GENERAL SPECIFICATIONS			
Nominal Diameter:	5 inch		
Rated Impedance:	8 ohms		
Operating Bandwidth:	65-6k hz (-3dB)		
Power Handling Capacity:	75 Watts		
Sensitivity (1W/M):	88 dB(+3dB)		
Voice Coil Diameter:	1 inch		
THIELE-SMALL PARAMETERS			
Resonance Frequency	Fs:	84.14 HZ	
DC Resistance	Re:	6.8ohm	
Mechanical Q Factor	Qms:	3, 21	
Electrical Q Factor	Qes:	1, 79	
Total Q Factor	Qts:	1, 15	
Equivalent Gas air load	Vas:	3.61 L	
Surface Area of Cone	Sd:	0.008 m2	
Efficiency Bandwidth Product	EBP	47	
Voice Coil Over Hang	X-max	3 mm	
PHYSICAL INFORMATION			
Basket:	Chrome Stamp Steel		
Magnet Type:	10 OZ		
Cone Material:	Injection PP		
Surround:	Rubber		
Dust Cap:	Injection PP		
Damper:	cloth		

CH A Ohm Resolution 1/6 Octave Unsmoothed Delay [ms] 0.000 Dist Rise [dB] 30.00

CH A dB SPL 1/6 Octave 48kHz 16k Rectangular Start 0.00ms Stop 341.31ms Freq LO 2.93kHz Length 341.31ms

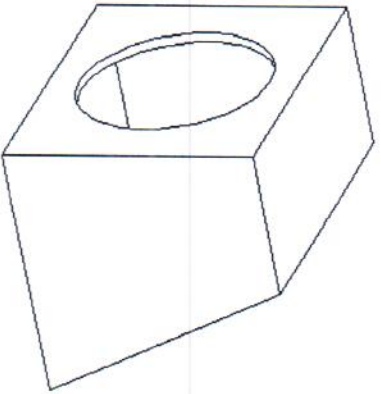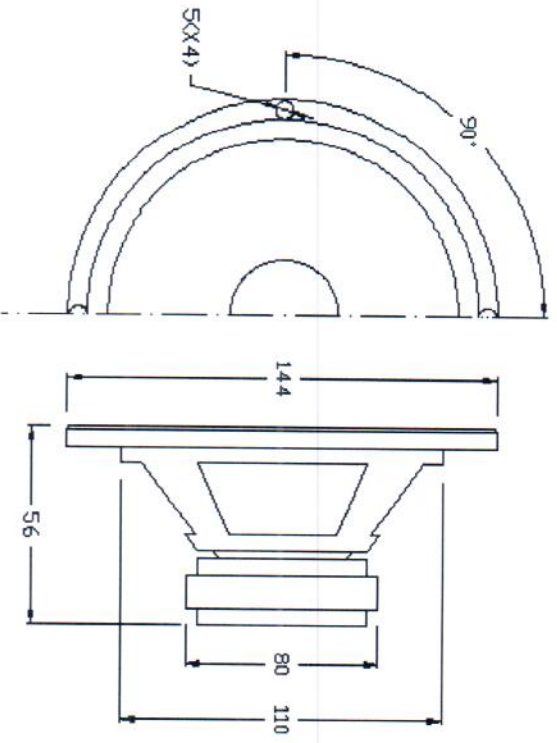

Sealed Box

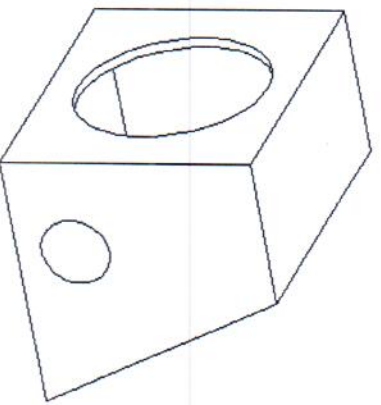

Vented Box

Suggested enclosure parameters	Sealed		Vented	
	Small	Large	Small	Large
Enclosure volume, cu. ft.	0, 35	NA	0, 4	NA
Vent length, inches	-	-	4, 8	-
Vent diameter, inches	-	-	2, 0	-
Enclosure Frequency, Hz	94	-	-	-
Fb Tuning Frequency of Vented Enclosure, Hz	NA	-	60	-
F3 Systems 3dB Down Point (Sealed), Hz	69	-	-	-