



Akumulator żelowy VIPOW 12V 75Ah




Specifications

LP75-12		
Nominal Voltage	12V	
Rated Capacity (20 hours rate)	75Ah	
Dimension (±2mm)	Total Height (with terminals)	222mm
	Length	260mm
	Width Height	169mm 222mm
Weight (Approx)	22.7Kg	


Characteristics

Capacity	10 hours rate (10A) 3 hours rate (25A) 1 hours rate (55A)	75Ah 53Ah 43Ah
Internal Resistance	Full Charged Battery 25°C	4.8mΩ
Capacity Affected By Temperature (10 hours rate)	40°C 25°C 0°C -15°C	102% 100% 85% 62%
Residual Capacity (25°C)	Capacity After 3 Months Storage Capacity After 6 Months Storage Capacity After 12 Months Storage	91% 82% 64%
Float Service Life (Above 3 Years)	Voltage 13.6~13.8V/12V (25°C) 电压在 13.6~13.8/12V (25°C)	
Design Life	Above 5 Years 大于5年	
Charge (Constant Voltage 25°C)	Initial Charging Current Less Than 22.5A; Voltage 14.5~14.9V 电压 14.5~14.9V; 最大电流为22.5A	

★ The above are average and date obtained from the first 3 charge/discharge cycles. These are not minimum values.

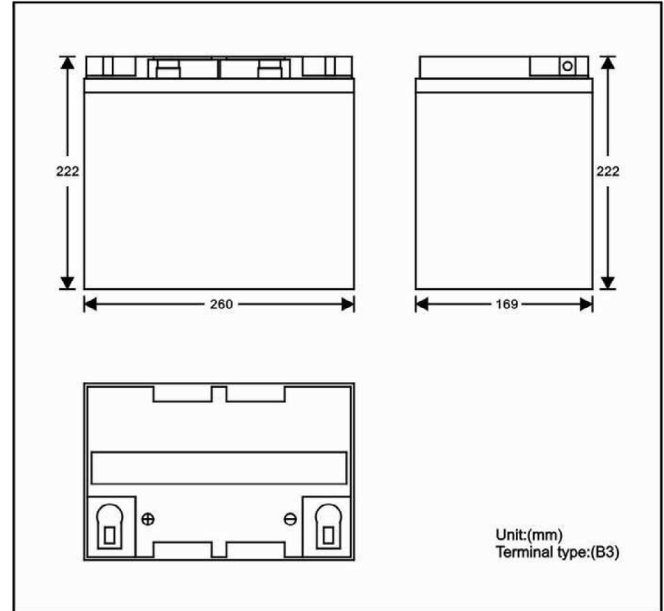

Discharge Current & Duration Time

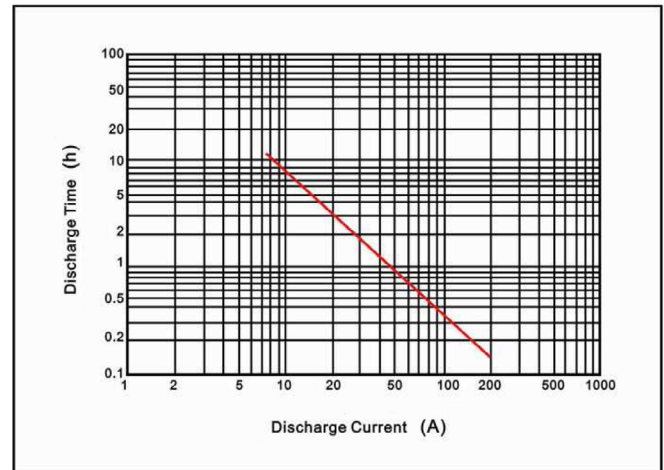

Discharge Current 25°C

