



Akumulator żelowy VIPOW 6V 3.3Ah




Specifications

LP3.3-6		
Nominal Voltage	6V	
Rated Capacity (20 hours rate)	3.3Ah	
Dimension (±2mm)	Total Height (with terminals)	66mm
	Length	125mm
	Width Height	33mm 60mm
Weight (Approx)	0.67Kg	


Characteristics

Capacity	20 hours rate (0.16A)	3.2Ah
Discharge Current Testing (25°C)	20 I ₂₀ rate (3.2A, 27min) 60 I ₂₀ rate (9.6A, 7min)	35min 7.5min
Internal Resistance	Full Charged Battery 25°C	30mΩ
Capacity Affected By Temperature (20 hours rate)	40°C 25°C 0°C -15°C	102% 100% 85% 62%
Residual Capacity (25°C)	Capacity After 3 Months Storage Capacity After 6 Months Storage Capacity After 12 Months Storage	91% 82% 64%
Cycle (Above 300 Time)	Discharge 2hrs at 0.8A Current Charge 6hrs at 0.32A Current (25°C)	
Charge (Constant Voltage)	Cycle (25°C)	Initial Charging Current Less Than 0.96A; Voltage 7.25~7.45V
	Float (25°C)	Charge Voltage 6.8~6.9V

★ The above are average and date obtained from the first 3 charge/discharge cycles. These are not minimum values.

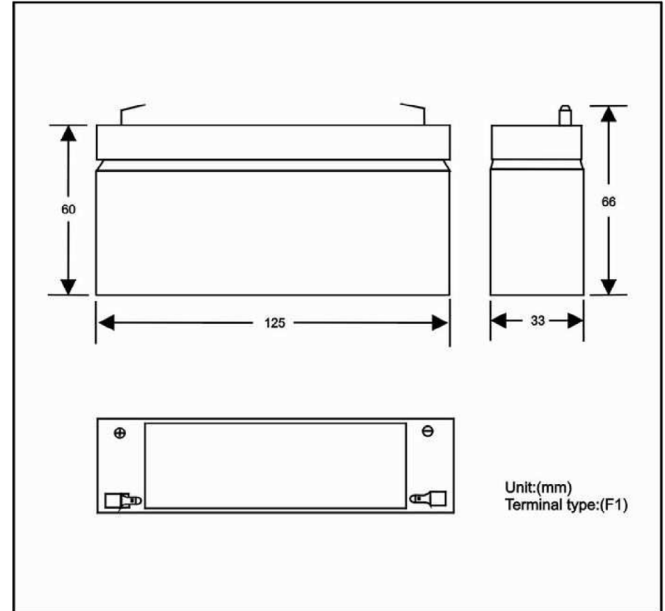

Discharge Current & Duration Time

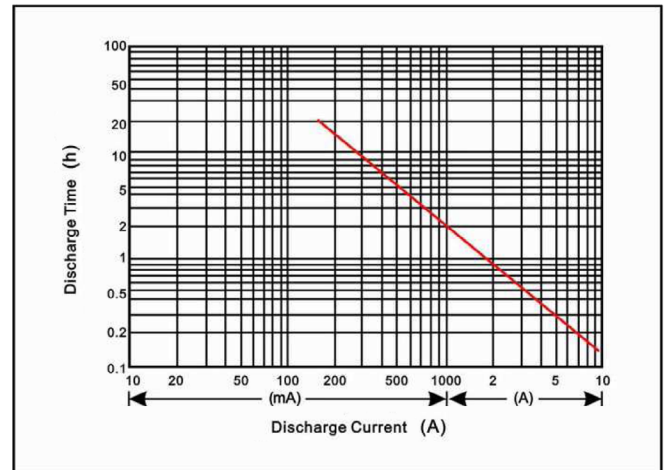

Discharge Current 25°C

