


# MODEL: BAT0215



## Plane Chart:

Unit:(mm) Terminal type:(F2)

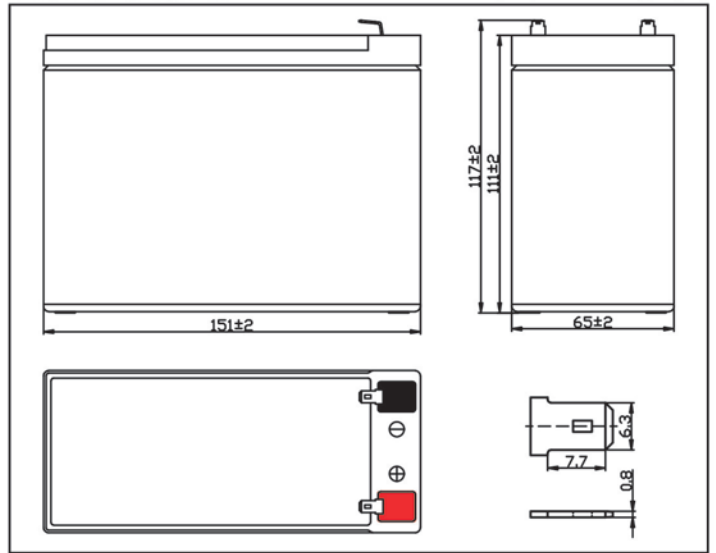


ISO 9001  
ISO 14001  
OHSAS18001




## Parameter Chart:

Volts		12V
Capacity(25°C)	20 hours rate (0.5A)	10Ah
Discharge Current Testing (25°C)	20 I <sub>20</sub> rate (10A,27min)	37min
	60 I <sub>20</sub> rate (30A,7min)	8min
Internal Resistance	Full Charged Battery 25°C	15mΩ
Capacity Affected By Temperature	40°C	104%
	25°C	100%
	0°C	83%
	-15°C	65%
Residual Capacity (25°C)	Capacity After 3 Months Storage	91%
	Capacity After 6 Months Storage	82%
	Capacity After 12 Months Storage	65%
Charge (Constant Voltage)	Cycle (25°C)	Initial Charging Current Less Than 3A Voltage 14.5~14.9V
	Float (25°C)	Charge Voltage 13.6~13.8V
Weight (Approx)		2.94Kg

## Residual Capacity

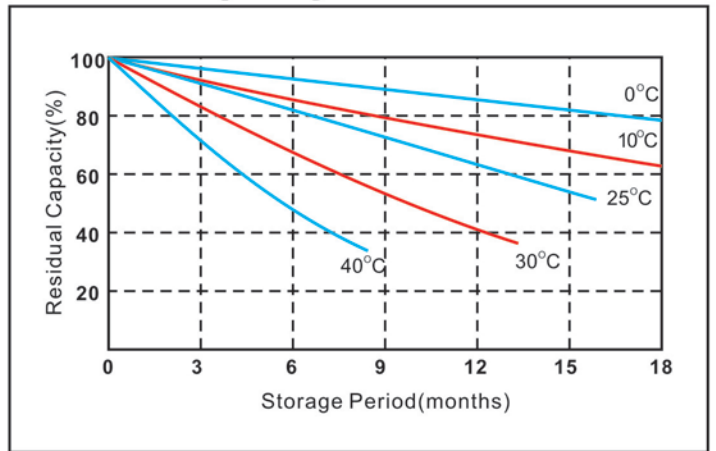


## Discharge Current 25°C

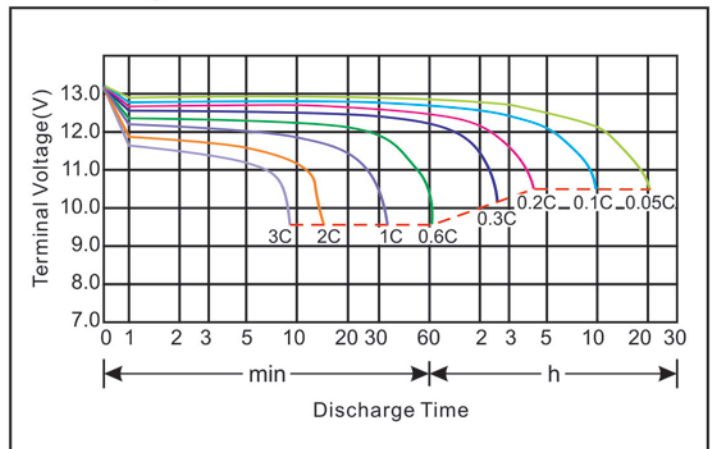


★ The above are average and data obtained from the first 3 charge/discharge cycles. These are not minimum values.

# MODEL: BAT0215

## Constant voltage charging characteristics

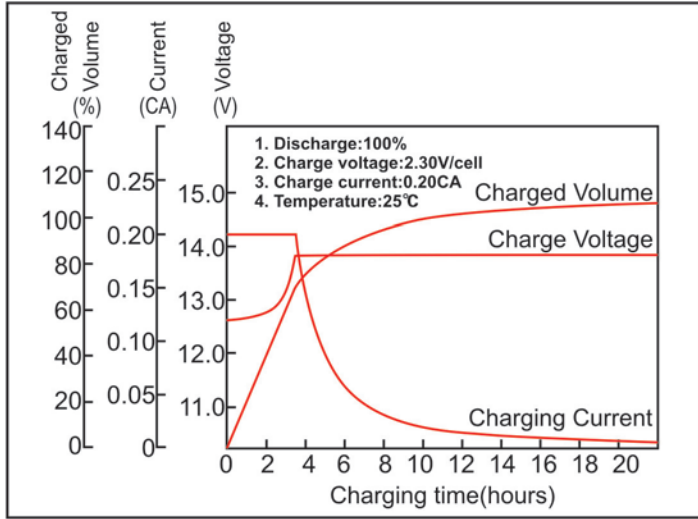

## Float Life

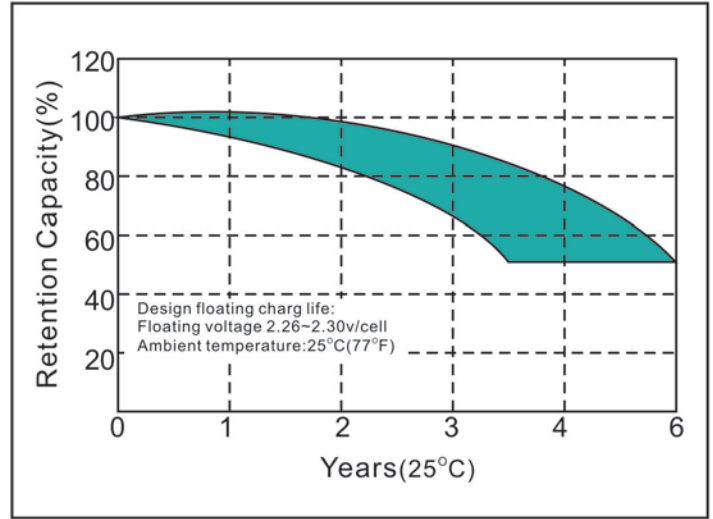

## Constant Current Discharge Characteristics (A, 25°C)

F.V/Time	5min	10min	15min	30min	60min	2h	3h	5h	8h	10h	20h
9.60V	42.90	28.27	20.90	11.66	6.38	3.52	2.40	1.66	1.10	0.89	0.51
10.2V	40.81	26.62	19.91	11.22	6.13	3.47	2.37	1.64	1.09	0.89	0.50
10.5V	39.71	26.18	19.58	10.89	6.01	3.43	2.34	1.63	1.08	0.88	0.50
10.8V	38.28	25.30	19.03	10.67	5.82	3.40	2.32	1.61	1.08	0.88	0.48

## Constant Current Discharge Characteristics (Watt, 25°C)

F.V/Time	5min	10min	15min	30min	60min	2h	3h	5h	8h	10h	20h
9.60V	478.50	319.00	238.70	133.10	73.92	41.14	28.49	19.80	13.31	10.69	5.98
10.2V	455.40	300.30	226.60	128.70	70.95	40.59	28.05	19.58	13.09	10.64	5.96
10.5V	442.20	294.80	223.30	124.30	69.52	40.15	27.83	19.36	12.87	10.61	5.94
10.8V	426.80	284.90	216.70	122.10	67.43	39.71	27.61	19.14	12.76	10.56	5.92

## Capacity Factors With Different Temperature

Battery Type		-20°C	-10°C	0°C	5°C	10°C	20°C	25°C	30°C	40°C	45°C
Battery	12V	50%	70%	83%	85%	90%	98%	100%	102%	104%	105%

★The above are average and data obtained from the first 3 charge/discharge cycles. These are not minimum values.